# Latest Products



- Smaller conductor and OD, 25 AWG or 0.44 mm / 0.017 inch. conductor and 4.6 mm / 0.18 inch. OD;
- Easier installation and space saving due to the smaller size;
- Cost-effective, more than 20% saving than standard 23 AWG Cat6;
- Ideal for residential use and short link use up to 10 Meters;
- Packed with patented 305 m / 1000 feet Easy Reel Box
- Supports IEEE 802.3af: POE (12.95W); IEEE 802.3at: POE+ (25.5W);

## SFTP Cat6a 26 AWG for Short Link Use Up to 60 Meters

- Smaller conductor and OD, 26 AWG or 0.40 mm / 0.016 inch. conductor and 6.0 mm / 0.236 inch. OD;
  - Easier installation and space saving due to the smaller size;
    - Cost-effective, more than 30% saving than standard 23 AWG Cat6a;
      - Ideal for data center use and short link use up to 60 Meters;

## Trunk Cable for Data Center (4 and 6 x 4 Pairs of Cat6a/Cat7)

- Fast and easier installation make it ideal for data center application;
- Length AWG23 from 5 to 80 m, AWG26 from 5 to 55 m;
- AWG26 up to 30% volume and weight reduction compared to AWG23;
- Exceeds Cat.6A ISO Class EA (500 MHz); ISO/IEC 11801 ed. 2.2







For more information and free sample, pls feel free to contact us.

HONG KONG OFFICE

Room 2102, Landmark North, 39 Lung Sum Avenue, Sheung Shui, Hong Kong TEL: +852 2668 8903 FAX: +852 2668 8701

**DONGGUAN FACTORY** 

107 Luyuan Road, Ke Yuan Cheng, Tangxia, Dongguan, China TEL: +86 769 8788 8089 FAX: +86 769 8788 8023

SITE: www.CalebCable.com EMAIL: sales@calebcable.com info@calebcable.com







# Latest Products



- Patented non-continuous Al-pet foil design to enable a smaller OD 7.2 mm / 0.283 inch;
- Easier installation and space saving due to the smaller size;
- Pass Alien NEXT and with Delta certificate;



- Rodent resistant and suitable for outdoor and direct burial application;
  - Excellent mechanical strength;
    - Non toxic gas released during burning and with low smoke feature: IEC 60754 & IEC 61034;
      - Flame performance: IEC 60332-3C;
        - Smaller diameter 9.6 mm / 0.378 inch with only one layer of inner sheath;

## **Industrial LAN: SF-UTP Cat5e PUR 26 AWG**

- Performance verified to TIA/EIA-568-C.2 and ISO/IEC 11801; It can pass component level when assembled into patch cord;
- Flame performance: IEC 60332-1; Halogen free: IEC 60754;
- Very flexible design due to the conductor design AWG26/7 and high coverage of TC braiding quality and good quality PUR jacket.
- Oil resistant: EN60811-2-1; Chemical resistant;
- Protected against EMI influence;

For more information and free sample, pls feel free to contact us.

HONG KONG OFFICE

Room 2102, Landmark North, 39 Lung Sum Avenue, Sheung Shui, Hong Kong TEL: +852 2668 8903 FAX: +852 2668 8701

**DONGGUAN FACTORY** 

107 Luyuan Road, Ke Yuan Cheng, Tangxia, Dongguan, China TEL: +86 769 8788 8089 FAX: +86 769 8788 8023

SITE: www.CalebCable.com EMAIL: sales@calebcable.com info@calebcable.com







# Latest Products

### **Fire Resistant SF-UTP Cat5e**


- Flame retardant: IEC 60332-1& CM;
- Non toxic gas released during burning and with low smoke feature: IEC 60754 & IEC 61034;
- Fire resistance to IE60331 >3 hours at 750 °C; BS EN50200 > 2 hours at 950 °C;
- Able to keep circuit integrity and monitoring &security system functioning in the event of fire;

### CMP LAN Cables: UTP Cat5e and Cat6

- UL listed; UL File NO. E334179;
  - Flame rating: Plenum NFPA 262, CMP;
    - Performance verified to TIA/EIA-568-C.2 and ISO/IEC 11801:
      - FEP insulation and Plenum Jacket:

#### **Weather Resistant IPTV LAN**

- Waterproof, and UV resistant;
- Flame retardant: IEC 60332-1& CM:
- Non toxic gas released during burning and with low smoke feature: IEC 60754 & IEC 61034;
- Suitable for indoor and outdoor usage; Ideal for IP CCTV security system;
- Available in different construction and different jacket colors.
- Supports IEEE 802.3af: POE (12.95W); IEEE 802.3at: POE+ (25.5W);

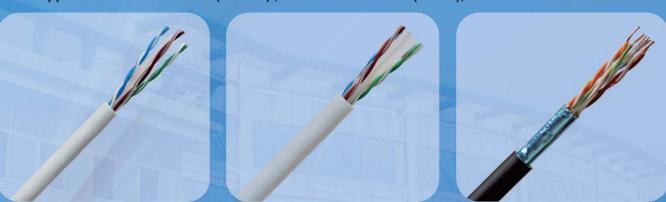

For more information and free sample, pls feel free to contact us.

Room 2102, Landmark North, 39 Lung Sum Avenue, Sheung Shui, Hong Kong TEL: +852 2668 8903 FAX: +852 2668 8701

DONGGUAN FACTORY 107 Luyuan Road, Ke Yuan Cheng, Tangxia, Dongguan, China TEL: +86 769 8788 8089 FAX: +86 769 8788 8023

SITE: www.CalebCable.com EMAIL: sales@calebcable.com info@calebcable.com





